This line should measure 50mm when printed correctly

This drawing is the copyright of Roberts Limbrick Ltd and should not be reproduced in whole or in part or used in any manner whatsoever without their written permission.

Responsibility is not accepted for errors made by others in scaling from this drawing. Use only figured dimensions and report any discrepancies or omissions to the Architect immediately.

Rev	Date	By	Chk	Description
P01	31.01.24	TH	TH	Issued for planning

1 Tree Pit Detail 1:
Tree within soft landscape

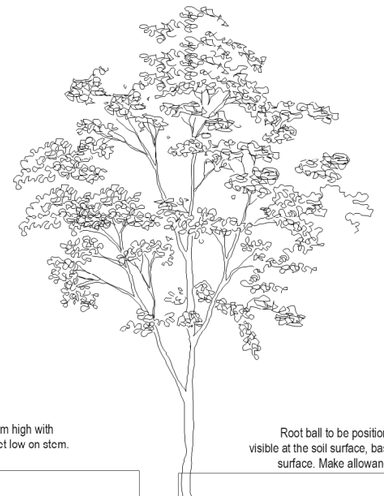

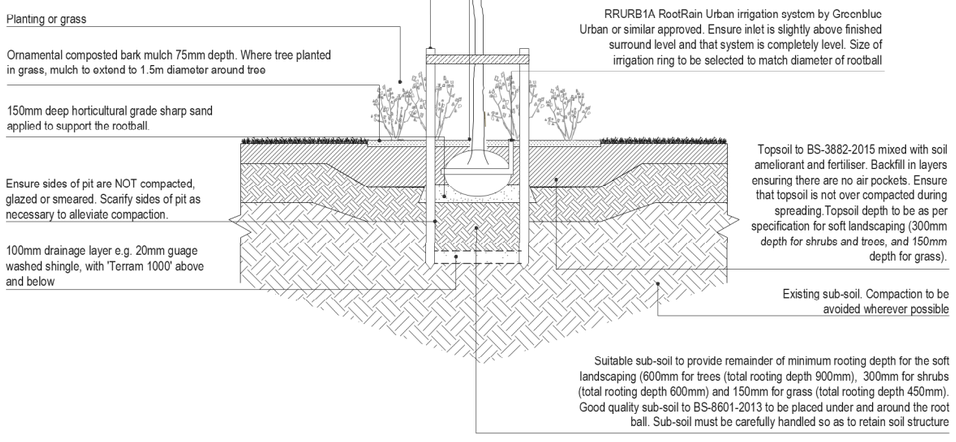

2 Tree Pit Detail 2:
Tree with hard landscape to one side or 2 sides of the tree pit (where width of tree pit is 2m or greater).

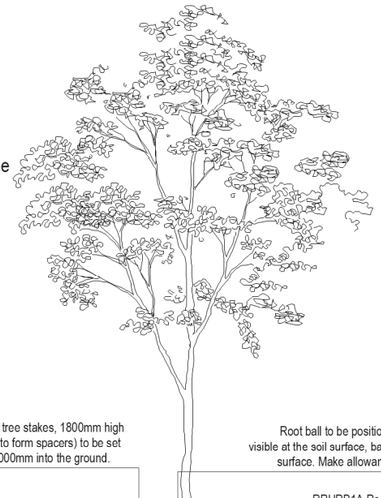

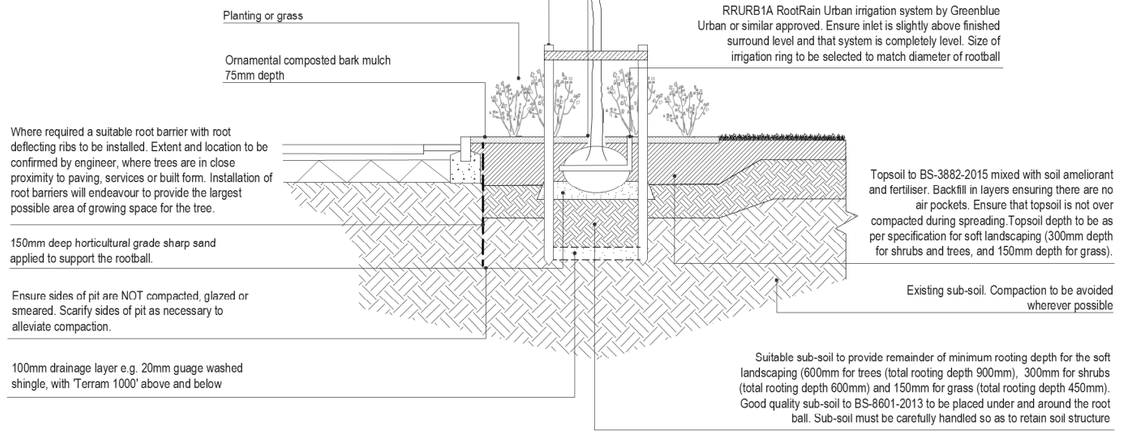

TREE PITS:
- Tree pits to be excavated to minimum of 1500 x 1500 x 900mm.
- Ensure root flare is not buried.
- The base shall be broken up by a further 150mm with the sides well scarified to prevent smearing and present an open-textured face.
- Trees are to be placed into the pits and backfilled with topsoil to BS-3882-2015, incorporating slow release fertilizer (e.g. 250g of Vitax Neutricote 180) and 50 litres of a non-peat based tree planting and mulching compost. Compost to be worked into top 200mm only.
- Water in all trees at the end of each day of planting to ensure continued success.

Roberts Limbrick
03333 405 500
mail@robertslimbrick.com
robertslimbrick.com
Registered Office: England No. 06658029

Project Name
Land north of Rounds Gardens, Rugby

Client Name
ST.MODWEN HOMES

Drawing Title
TREE PIT DETAILS

Scale	Orgin. No
1:50 • A3	10689

Status	Purpose Of Issue
A3	Issued for planning

Project	Org	Vol	Level	Form	Role
R9112	RL	XX	ZZ	DR	L

Number	Revision
P8004	C01